


POSIZIONE 4-5

POSITION 4-5

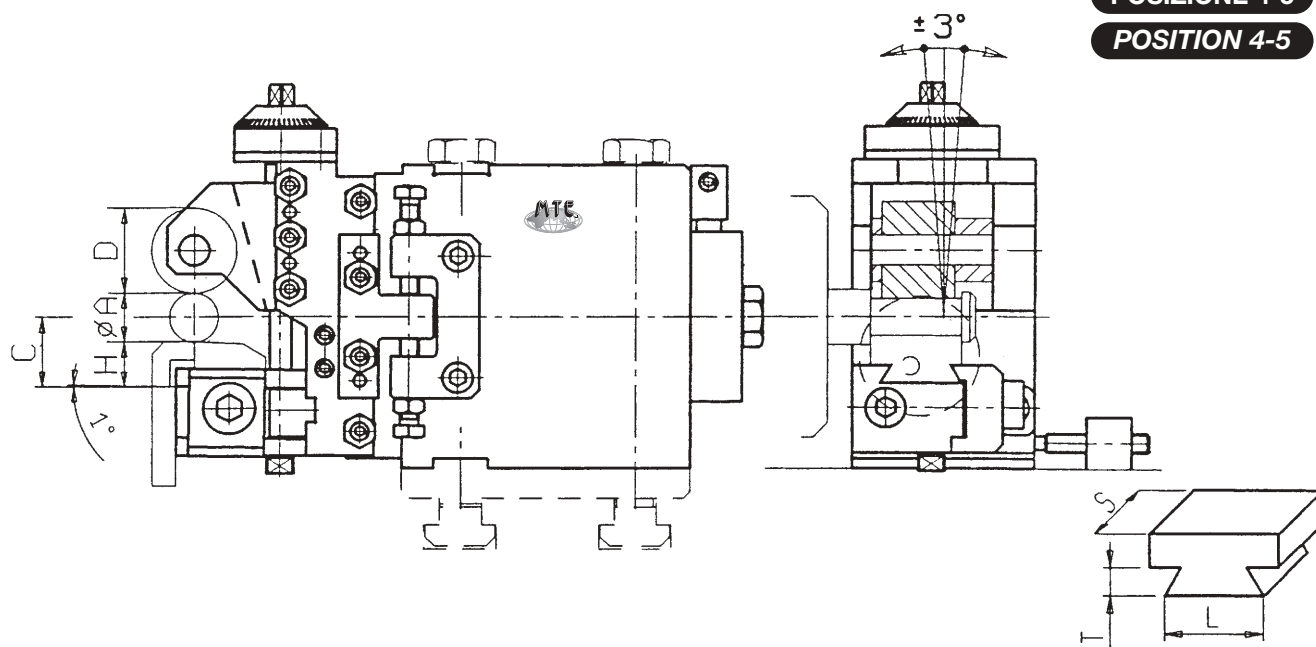

SEGUE TABELLA - FOLLOW TABLE

ARTICOLO ARTICLE	MACCHINA MACHINE	POS. POS.	Ø A BARRA Ø A BAR	Ø D RULLO Ø D ROLLER	L	S	T	C	H
ART. 158.22.10									
WICKMAN									
158.10.22.10	5/8"	4-5	min Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
GILDEMEISTER									
158.11.22.10	AS 16 - GM 6	4-5	min Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
158.15.22.10	AS 20 - GS 20 - GM 20	4-5	mn Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
SCHÜTTE									
158.08.22.10	SF 13	4-5	min Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
158.21.22.10	SE 16 - SF 20	4-5	min Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
MORI SAY - EUROTURN									
158.14.22.10	6/20	4-5	min Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
INDEX									
158.13.22.10	MS 25	2-3-5	min Ø 6 - max Ø 22	min Ø 22 - max Ø 28	23	20	3.5	20.5	20.5-A/2
ART. 158.26.10									
WICKMAN									
158.20.26.10	1"	2-4-5	min Ø 6 - max Ø 26	min Ø 24 - max Ø 34	28	23	6.5	23	23-A/2
SCHÜTTE									
158.22.26.10	SE 25	4-5	min Ø 6 - max Ø 26	min Ø 24 - max Ø 34	28	23	6.5	23	23-A/2
158.46.26.10	SF 26	4-5	min Ø 6 - max Ø 26	min Ø 24 - max Ø 34	28	23	6.5	23	23-A/2
158.55.26.10	SF 26L	4-5	min Ø 6 - max Ø 26	min Ø 24 - max Ø 34	28	23	6.5	23	23-A/2
MORI SAY - EUROTURN									
158.24.26.10	6/25	4-5	min Ø 6 - max Ø 26	min Ø 24 - max Ø 34	28	23	6.5	23	23-A/2
INDEX									
158.13.26.10	MS 25	4-5	min Ø 6 - max Ø 26	min Ø 24 - max Ø 34	28	23	6.5	23	23-A/2

A RICHIESTA PER ALTRI TIPI DI MACCHINA - ON REQUEST FOR OTHER TYPES OF MACHINE

A RICHIESTA ALTRE ATTREZZATURE/FURTHER EQUIPMENTS ON REQUEST

ARTICOLO ARTICLE	MACCHINA MACHINE	POS. POS.	Ø A BARRA Ø A BAR	Ø D RULLO Ø D ROLLER	L	S	T	C	H
ART. 158.34.10									
WICKMAN									
158.30.34.10	1" 3/8	2-4-5	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
GILDEMEISTER									
158.27.34.10	AA 32	4-5-6-7	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
158.31.34.10	AS 32	4-5	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
158.56.34.10	GM 32	3-4-5	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
SCHÜTTE									
158.33.34.10	SD 25 - SD 32	3-4-5	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
MORI SAY - EUROTURN									
158.24.34.10	6/32	3-4-5	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
158.53.34.10	8/32	4-5-6-7	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
INDEX									
158.61.34.10	KS 32	3-4-5	min Ø 28 - max Ø 34	min Ø 26 - max Ø 32	40	34	9	33	33-A/2
ART. 158.53.10									
WICKMAN									
158.30.53.10	1" 3/4	2-4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
GILDEMEISTER									
158.32.53.10	AS 40 - AS 48	4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
158.36.53.10	AA 48	4-5-6-7	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
158.47.53.10	GM 42	3-4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
SCHÜTTE									
158.42.53.10	SD 50	4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
158.48.53.10	AD 40	4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
MORI SAY - EUROTURN									
158.28.53.10	6/42	4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
INDEX									
158.35.53.10	KS 42	4-5	min Ø 26 - max Ø 53	min Ø 28 - max Ø 32	40	34	9	43	43-A/2
ART. 158.65.10									
WICKMAN									
158.40.65.10	2" 1/4	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
158.41.65.10	2" 5/8	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
158.50.65.10	3" 1/2	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
158.58.65.10	3" 1/4	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
GILDEMEISTER									
158.44.65.10	AS 55 - AS 67	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
158.51.65.10	AA 67	4-5-6-7	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
SCHÜTTE									
158.43.65.10	SD 63-80	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
PITTLER DAM									
158.37.53.10	6/50	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
158.39.34.10	8/32	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2
158.65.34.10	6/32	4-5	min Ø 30 - max Ø 65	min Ø 28 - max Ø 42	50	45	12	63	63-A/2