



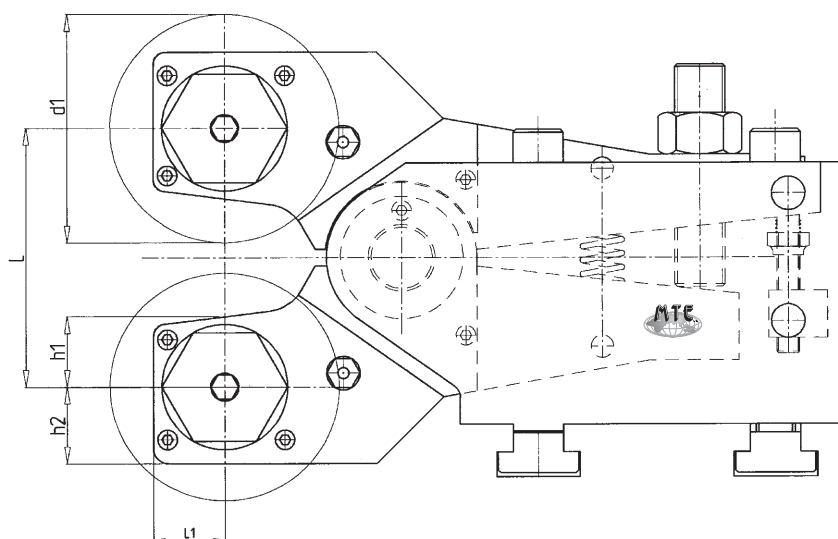

ADATTATORI

ADAPTOR

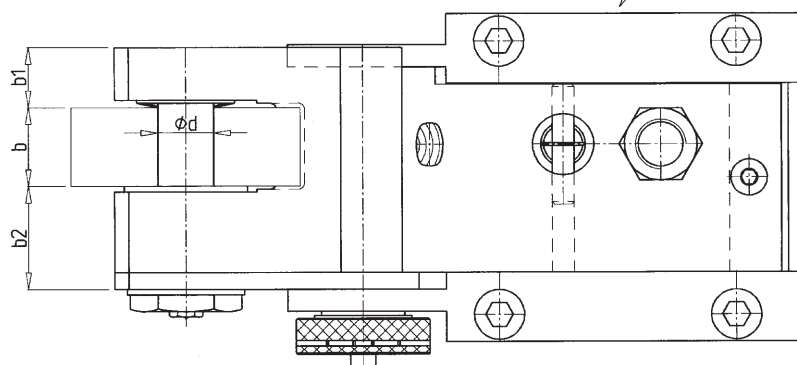

SEQUE TABELLA

FOLLOW TABLE

A RICHIESTA ALTRE ATTREZZATURE/FURTHER EQUIPMENTS ON REQUEST

ARTICOLO ARTICLE	MACCHINA MACHINE	POS. POS.	b	b1	b2	d	d1 max	h1	h2	L	L1
ART. 160.1											
WICKMAN											
160.20.10	1"	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
GILDEMEISTER											
160.11.10	AS 16	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
160.15.10	AS 20 - GM 20 - GS 20	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
SCHÜTTE											
160.21.10	SE 16 - SF 20	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
160.22.10	SE 25	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
160.23.10	SF 40 - SF 42	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
160.33.10	SD 25 - SD 32	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
160.49.10	SF 51	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
MORI SAY - EUROTURN											
160.24.10	6/25 - 6/32	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
PITTLER											
160.25.10	PRB 8/25	4-5	23	16.3	39.4	16	60	16.5	22	62±8	23
ACME GRIDLEY											
160.57.10	1" 1/4	3-4	23	16.3	39.4	16	60	16.5	22	62±8	23

A RICHIESTA PER ALTRI TIPI DI MACCHINA - ON REQUEST FOR OTHER TYPES OF MACHINE

ARTICOLO ARTICLE	MACCHINA MACHINE	POS. POS.	b	b1	b2	d	d1 max	h1	h2	L	L1
ART. 160.2											
WICKMAN											
160.30.20	1" 3/4 - 3/8	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.40.20	2" 1/4	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.41.20	2" 5/8	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
GILDEMEISTER											
160.18.20	AS 25	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.27.20	AA 32	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.31.20	AS 32	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.47.20	GM 35	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.56.20	GM 32	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.32.20	AS 48	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.36.20	AA 48	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.44.20	AS 55-67	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
SCHÜTTE											
160.33.20	SD 25 - SD 32	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.42.20	SD 50	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.43.20	SD 63 - SD 80	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.49.20	SF 51	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
INDEX											
160.34.20	KS 25	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.35.20	KS 42	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.60.20	KS 18	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.61.20	KS 32	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.62.20	KS 50	4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
PITTLER											
160.25.20	PRB 8/25	3-4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
160.26.20	PRB 8/32 - PRC 6/32	3-4-5	28	21.4	46	20	76	21.5	28	82±10	25.5
BSA											
160.59.20	2"	3-4	28	21.4	46	20	76	21.5	28	82±10	25.5
ACME GRIDLEY											
160.57.20	1" 1/4	3-4	28	21.4	46	20	76	21.5	28	82±10	25.5
ART. 160.3											
WICKMAN											
160.30.30	1" 3/4 - 3/8	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.40.30	2" 1/4	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.41.30	2" 5/8	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
GILDEMEISTER											
160.32.30	AS 48	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.36.30	AA 48	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.44.30	AS 55 - 67	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
SCHÜTTE											
160.33.30	SD 25 - SD 32	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.42.30	SD 50	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.43.30	SD 63 - SD 80	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.49.30	SF 51	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
INDEX											
160.34.30	KS 25	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.35.30	KS 42	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.60.30	KS 18	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.61.30	KS 32	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
160.62.30	KS 50	4-5	28	21.4	46	20	82	25.3	27.5	93±13	25.5
BSA											
160.59.30	2"	3-4	28	21.4	46	20	82	25.3	27.5	93±13	25.5